# TRIPLE"5" Specialties Curp.


### **FLEXA DRAIN**

\*saves time; easy; economical \*no special tools required

\*bends to the shape needed \*offsets to 2" \*eliminates offsets

1-1/2" Tailpiece 71-02000 71-03125 1-1/4" Extension 71-03150 1-1/2" Extension

STAY FLEX HEAVY DUTY SEE PAGE 77

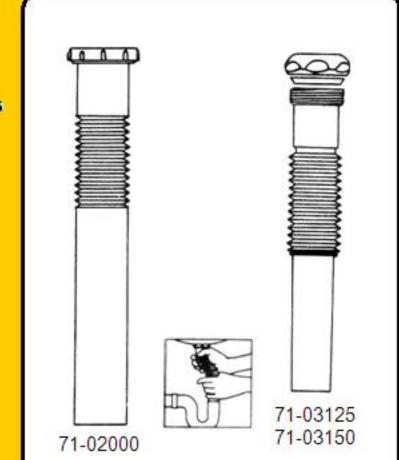

### **FLEXA COUPLING**

1-1/2" coupling allows any angle 71-11000

necessary STAY FLEX HEAVY DUTY SEE PAGE 77

# **FLEXA T.O.E**

1-1/4" threaded on one end to 71-12000

screw

into a lavatory pop-up waste.


## COMBO-FLEXA DRAIN

1-1/2" combination tailpiece or 71-13000

extension tube

-just use or remove the tailpiece and nut

FLEXA POP-UP ASSEMBLY 71-14000

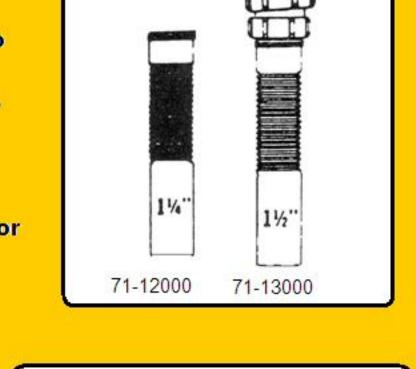

71-14000

lavatory pop-up waste with double flex ability.

**FLEXA "J" BEND** 1-1/2" 71-10000

STAY FLEX HEAVY DUTY SEE PAGE 77

71-05000 striker 71-05001 flint renewal

**BELL TOP STRIKER** 

71-05005 flint renewal 5 pack


STOP-IT SUDS CHECK VALVE



71-10000

Stop-It Suds Check Valve-simply insert into a flanged tailpiece under the duo strainer to eliminate backups from

dishwashers or slow drains. Does not restrict sink drainage. 71-06000



## copper tubing and fittings quick and easy.

A full sized 6" x 9-1/2" maroon abrasive pad. Makes cleaning

SCRATCH BRITE ABRASIVE PADS

most. 71-08060 Abrasive Pads-60/carton SCOTCH BRITE PADS-3M

Comparable to any pad in the field-Superior to



and easy. 60 pads/carton 71-08560

Nylon pads can be used and re-used. 6" x 9-1/2"



## 71-15000

STEEL WOOL

Steel Wool 16pads/bx 12bx/case

"B" TANK KEY

71-09000

71-01000



For use where venting or re-

# 1-1/2" AUTOMATIC TRAP VENT

venting is impossible or impractical.

drainage system without venting through the

roof or to open atmosphere. Air admittance

Triple "S" Ayrlett® Automatic Air **Admittance Valve** 

### General An Ayrlett® Air Admittance Valve provides an

acceptable means for ventilating a plumbing

valves ensure that no sewer gases or liquids will enter the building through the valve. The device shall close by gravity and seal at zero differential pressure and remain closed under positive internal pressure (back pressure). This device shall open under negative pressure to allow proper drainage to occur without siphoning of fixture traps. **Features** Rated for 20 DFUs for venting DWV 4" and

smaller. Tested to work effectively in temperatures ranging from -40°to + 150° F

per code specifications Listings

(revised 2002)

#### Valves open at -0.01 psi and seal at 0 psi and above No protective cover required when installed

IAPMO-Classified Mark Code approvals

ASSE 1051 A&B

# 1993

11/4" ips; 11/2"; 2"

71-01510

International Residential Code (IRC) 2003 **Building Official Code Administration (BOCA)** 

International Plumbing Code (IPC) 2003

Uniform Plumbing Code (UPC) Section 301.2

fits 11/2" and 2" PVC

Alternative Materials and Methods 2003

71-01515 PVC with adapter: fits 11/4" ips; 11/2"; 2" 71-01715 ABS with adapter: fits





#### **Features** #71-01515 Rated for 20 DFUs for venting DWV 4", 3" and 2". #71-01616 Rated for 20 DFUs for venting DWV 4", 3" and 2".

Valves open at -0.01 psi and seal at 0 psi and above No protective cover required when installed per code specifications #71-01800 Rated for 500 DFUs for venting for 4" and 3"

Tested to work effectively in temperatures ranging from -40°to + 150° F

(revised 2002) ASSE 1051 A&B IAPMO-Classified Mark

#71-01510

#71-01515

60-22750

Code approvals

Listings

International Plumbing Code (IPC) 2003 International Residential Code (IRC) 2003 **Building Official Code Administration (BOCA) 1993** 

Triple "S" Air Vent - 1 1/2 " x 2"

Triple "S" Air Vent with adapter

Alternative Materials and Methods 2003

#71-01610 Triple "S" Air Vent - 1 1/2 " x 2"

Uniform Plumbing Code (UPC) Section 301.2

#71-01616 Triple "S" Air Vent with adapter #71-01800 Triple "S" Air Vent 4" and 3"

Air Admittance Valve in Utility Box

60-22500 PVC with adapter: fits 11/4" ips; 11/2"; 2" 20 DFU ABS with adapter: fits 11/4" ips; 11/2"; 2" 20 DFU 60-22700 Rough in dimensions 4"W x 31/2"D x 51/2"H

Air Admittance Valve in Utility Box w Louvered Cover PVC with adapter: fits 11/4" ips; 11/2"; 2" 20 DFU 60-22550

Rough in dimensions 4"W x 31/2"D x 51/2"H

ABS with adapter: fits 11/4" ips; 11/2"; 2" 20 DFU

